



# THIRTYPLUS™ HAY PRESERVATIVE, APPLICATOR SYSTEMS & PRECISION ACCESSORIES FOR BALED HAY.

APPLICATORS • MOISTURE SENSORS • AUTOMATIC CONTROLS  
CONTROL OPTIONS • ProID™ SYSTEM • PRECISION ACCESSORIES



THIRTYPLUS™

**CASE II**  
AGRICULTURE

# AN ADVANCED BUFFERED ACID FOR BALING AT HIGH MOISTURES.

Maximize the number of acres baled per day with a chemically-buffered form of propionic acid formulated to prevent spoilage of valuable hay crops. Pound-for-pound, Case IH ThirtyPlus™ Hay Preservative does what straight propionic acid does; yet it's gentle on your baler with a pH of 6.0 that is as neutral as rainwater. It works on all types of hay, including alfalfa, grass, and other crops susceptible to spoilage at higher moistures.



ThirtyPlus has been on the market over 15 years and is a clear favorite when it comes to preserving bales.

## RETAIN BALE QUALITY.

Hay baled at higher moistures can heat and spoil. Case IH ThirtyPlus Hay Preservative will treat hay up to 30% moisture. Why risk it?

Untreated Hay Moisture	Damage
16 – 22%	Hay discoloration and odor can occur
23% – 26%	Hay temperatures can climb to 120°F in storage; mold will begin to form and quality drops significantly
Over 27%	Can result in temperatures over 140°F; hay can turn black and combust

## THIRTYPLUS BENEFITS YOUR OPERATION:

- Greener hay with higher feed value
- Works well on all types of hay
- No more waiting on the weather. Bale when you're ready at moistures up to 30%
- Non-corrosive formula won't harm baling equipment, operators or livestock
- When compared to other preservatives, ThirtyPlus is:
  - Easier to apply
  - Gives more consistent coverage
  - Won't clog application equipment
- Store treated hay for years. It will look and feed as fresh as when it was first baled
- Store outside. ThirtyPlus won't freeze or lose effectiveness over time

**THIRTYPLUS IS AVAILABLE IN FOUR SIZES FOR ANY SIZE BALING OPERATION.**

ThirtyPlus Hay Preservative Container Sizes†	
Totes	1,800 lbs/200 gal* (818 kg/757 L)
	2,380 lbs/270 gal (1,082 kg/1,020 L)
Drum	450 lbs/50 gal (204 kg/189.3 L)
Mini Drum	120 lbs/15 gal (54 kg/50.5 L)

\* Not available in Canada.

† ThirtyPlus Hay Preservative is not available in California.

- 200 or 270-gallon tote goes a long way and is preferred by larger square baler operators
- 50-gallon drum is enough for any size baler and will treat up to 100 tons of hay
- Easy-to-store 15-gallon drum works well for smaller operations

See **page 16** for a list of ThirtyPlus Hay Preservative part numbers.



**SAFE AND COST EFFECTIVE.**

Bales treated with ThirtyPlus Hay Preservative yield more tonnage, have a higher relative feed value and are safe for all livestock. Propionic acid, the main ingredient in ThirtyPlus, is an organic acid occurring naturally in a horse's gastrointestinal tract. In ruminants, propionic acid is produced by rumen bacteria, so it is beneficial in the digestive process.

ThirtyPlus Hay Preservative Ingredients	
<b>Active Ingredient</b> Propionic Acid Citric Acid	64.5% 5.0%
<b>Other Ingredients</b> Ammonium Hydroxide, Deionized Water, Dodecylphol Ethoxylate, Green Dyes	30.5%
<b>EPA Registration #73877-1-74898</b>	Total 100%

**WORRY-FREE APPLICATION.**

Gentle and effective, the ingredients in ThirtyPlus Hay Preservative will not cause corrosion on your baling equipment. When paired with approved Case IH applicators at the recommended application rate, you can be assured of maximizing your hay baling productivity year after year with ThirtyPlus.

Large Square Bales		
Hay Moisture	Stem Moisture	Dew Moisture Only
Under 22%	6 lbs/ton	3 lbs/ton
23% – 26%	10 lbs/ton	8 lbs/ton
27% – 30%	DO NOT BALE	16 lbs/ton

Small Square & Round Bales		
Hay Moisture	Stem Moisture	Dew Moisture Only
Under 22%	4 lbs/ton	2 lbs/ton
23% – 26%	8 lbs/ton	6 lbs/ton
27% – 30%	16 lbs/ton	12 lbs/ton

Not recommended on any hay above 30% moisture.

# BETTER BALES WITH BETTER APPLICATION EQUIPMENT.

Serious hay producers like you require greener hay with high feed value. The right application system makes a difference. Our automatic applicator moisture sensors accurately “read” moisture percentages in real time, adjusting every three seconds to match hay conditions. The sensors take the guesswork out of the application process, keeping your crops – large or small – in great condition without wasting product.



## LARGE SQUARE BALERS.

ThirtyPlus™ Hay Preservative is formulated with the large hay producer in mind. Bales produced between 16% and 27% moisture will not heat and will maintain their high quality, smell and appearance when treated with ThirtyPlus.

## ROUND BALERS.

Hay can be baled with ThirtyPlus Hay Preservative at moistures up to 30% with a round baler, extending the hours of operation. Although no preservative product can reduce outside weathering, ThirtyPlus can preserve the quality on the inside.

## SMALL SQUARE BALERS.

ThirtyPlus Hay Preservative enables hay to be baled at moistures up to 30% with small square balers. Get out in the fields early, even on cloudy days, and work later in the evenings when dew is heavier.


## DID YOU KNOW?

Tanks and saddles have been engineered to mount on all Case IH balers, as well as any other make and model, so they are easy to install, operate, and service, yet safely out of the way of other baler operations.

No matter what baler you use, there is a model of Case IH ThirtyPlus applicator for your implement.

# MOISTURE SENSORS FOR THE AUTOMATIC SYSTEMS.

Cleverly-designed sensors in the applicators accurately read moisture levels on round, large or small square balers. A positive sensor is mounted on one side and an isolated ground mount is on the other side. When the hay bale makes contact, a current passes through the bale, measuring moisture from one side to the other. Sensing all the way through the bale gives a moisture reading that is accurate to within + or - one point.

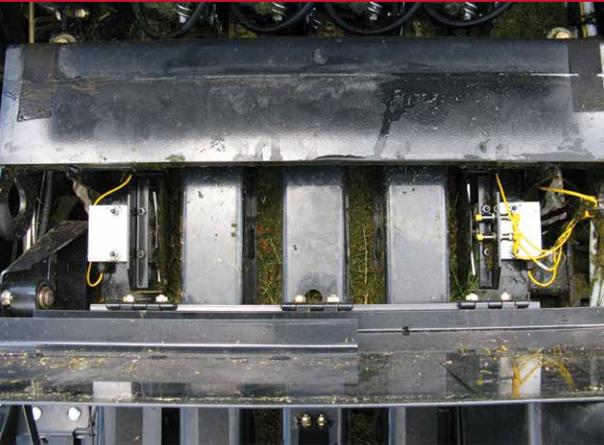

## LARGE SQUARE BALERS.

Automatic Systems for large square balers are equipped with star wheels that mount on the top of the bale chamber. Accurately reads moisture from 8% to 70%.



## ROUND BALERS.

Automatic Systems for round balers are equipped with two sensing discs, one mounted on each of the baler's sidewalls. Reads moisture from 8% to 60% on 300 and 600-Series Systems.



## SMALL SQUARE BALERS.

Sensors for the Automatic System on small square balers consist of two star wheels that mount on the bottom of the bale chute. Reads moisture from 8% to 32% on 300 and 600-Series Systems.


## PUMPING SYSTEMS & SPRAY SHIELDS.

600-Series Automatic Systems are equipped with three pumps and a built-in flowmeter, and the 300-Series Automatic Systems have a single pump with pulsing solenoid. As the hay moisture fluctuates, the system adjusts turns on the pumps needed to apply the right amount of preservative on the go.

The electronic applicator consists of a single pump and gauge. The pumping rate is increased or decreased by manually adjusting the control box in the cab.

Consistent preservative coverage throughout the crop is critical. Each baler model has a spray shield designed to fit specifically in the pick-up area, to assure complete and accurate coverage.

See **page 16** for a list of applicator, preservative and accessories part numbers.

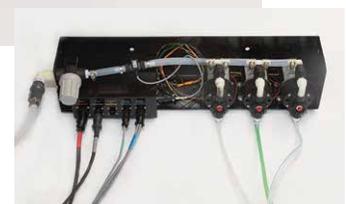

# SUCCESSFUL BALING IS BASED ON APPLICATION. AN AUTOMATIC SYSTEM MAKES IT EASY.

The automatic applicator system works on the go, applying the right amount of preservative, at the right time, based on moisture levels. No more waiting – bale with precision on your schedule. Bale faster, complete more tonnage and track the volume of preservative used. Application units attach to Case IH large square balers, conventional balers, small balers, round balers or any manufacturer's baler.



# AUTOMATIC CONTROLS FOR LARGE SQUARE BALERS.

## 600-SERIES.

The new 600-Series Automatic Applicator System for large square balers makes baling quality hay easier and more efficient. Features include:

- ISOBUS compatible
- Control and application information displayed through monitor in cab (no need for second display)
- Records bale information and job records
- Provides capacity to add on additional features such as ProRFV™, ProID™ tagger, dye sprayer, bale weight information and GPS
- Includes option to be controlled through the baler IOSBUS, or customer's iPad



If a baler or tractor is not equipped with an ISOBUS monitor, the operator has the option of using their own iPad or iPad mini™ with the addition of a Bluetooth® receiver. Any one of these options give the operator complete control and provides information for all the balers equipped with the automatic applicator. Both monitors display:

- Moisture content
- Speed of baling (tonnage) on large square and small square balers
- Volume of preservative used per bale
- Target application rate and actual application rate
- Total tons baled

The 600-Series Automatic Applicator System can be controlled by two displays:

- AFS Pro 700 Monitor
- iPad or iPad mini

# AUTOMATIC CONTROLS FOR ROUND AND SMALL SQUARE BALERS.

## 300-SERIES.

The new automatic system for round and small square balers. Consisting of a redesigned and compact processor, and a single bypass pump that supplies constant pressure to a pulsing solenoid, it is an improvement in efficiency and response time for applying preservative. The operator has the option of running the applicator through their own iPad\* or iPad mini via Bluetooth for a clear, colorful display. The automatic system is able to store up to 60 job records by field name with total tons baled, average high moisture, date and time, and amount of preservative used.

300 & 600-Series monitors display:

- Moisture content
- Speed of baling (tonnage)
- Volume of preservative used per bale
- Target application rate and actual application rate
- Total tons baled

\*Requirements to run iPad are 3rd Generation iPad (2012 or newer) with iOS 8 or greater operating system, plus Harvest Tec App.

## 600-SERIES.

The 600-Series Automatic Applicator System for round and small square balers makes baling hay and keeping track of bales virtually effortless. The system continuously monitors moisture readings and automatically adjusts application rates. It also features a USB port on the side of the processor, which allows job records to be downloaded onto a personal computer, and new software updates to be uploaded to the system. The system on small square balers has a built-in stroke counter to help the operator create a

more consistent bale by monitoring the number of flakes per bale. The system on round balers has an additional sensor on the bale door to identify individual bales and provide a more accurate tonnage reading.



# YOU SET THE STAGE FOR LARGE SQUARE BALERS.

Automatic applicators take the guesswork out of baling hay by sensing moisture content and adjusting preservative application rates on the go. You have complete control from the tractor with the baler's ISOBUS monitor, or the customer's iPad®. Leading-edge technology that works for you.



## AUTOMATIC MODE.

From the main operating screen, moisture readings are averaged every three seconds; baling rate every five seconds. Match application rate for precise application.



## SETUP.

Adjust moisture points or set rate per ton (weights for balers not equipped with scale can be estimated).

## MANUAL MODE.

Override automatic features and proceed as needed.

## DIAGNOSTICS.

Check pump outputs and voltage inputs as you go.

## JOB RECORDS.

Detailed job records record:

- Average and high-moisture levels
- Bale weight
- Amount of product used
- Date/time

A	B	C	D	E	F	G
FIELD	AVG MOISTURE	HIGH MOISTURE	PRESERVATIVE	BALE NUMBER	BALE WEIGHT	DATE/TIME BALED
W20	16	27	4.1	2241	1420	8 AUG 09 00:42
W20	20	29	6.3	2242	1510	8 AUG 09 00:43
W20	24	30	7.6	2243	1590	8 AUG 09 00:45
W20	28	41	8.2	2244	1465	8 AUG 09 00:46
W20	23	28	6.8	2245	1525	8 AUG 09 00:47
W20	18	27	5.5	2246	1510	8 AUG 09 00:49
W20	19	25	5.8	2247	1435	8 AUG 09 00:51
W20	20	23	6.2	2248	1475	8 AUG 09 00:52
W20	21	30	6.8	2249	1515	8 AUG 09 00:54
W20	29	39	8.3	2250	1455	8 AUG 09 00:55
W20	18	27	5.6	2251	1470	8 AUG 09 00:57
W20	17	25	4.8	2252	1480	8 AUG 09 00:58

See page 16 for a list of applicator part numbers.




[partstore.caseih.com](http://partstore.caseih.com)

# ROUND OR CONVENTIONAL BALERS, YOU'RE IN CONTROL.

Automatic applicators provide “in-the-field” office management for your baling operations.

## 300 AND 600 MONITORS.

- Control the automatic application of preservative
- Allow moisture to be read continuously by sensors, fed to the processor and displayed
- Measure speed of baling, along with the amount of preservative used, and the average moisture of the last bale
- Display moisture as it changes, 200 feet at a time
- Applicator automatically adjusts the rate of preservative application every three seconds when in automatic mode. Actual rate of application is read by a flow meter and displayed on the screen as “actual” and compared to the set “target” rate
- Adjusts for speed of baling on both automatic systems on conventional square balers
- Adjusts for speed of baling on 600-Series applicators on round balers

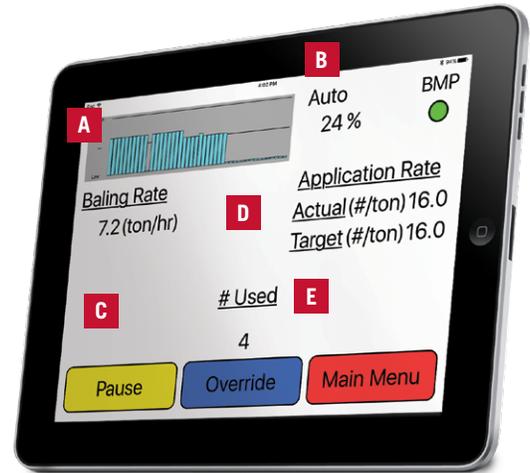

## 300 & 600 monitors display:

- A** Graph of the last 200 feet of window
- B** Current moisture
- C** Moisture of last bale
- D** Actual and target rate
- E** Preservative used so far

# EVERYDAY ELECTRONIC CAB CONTROL.

For smaller-scale operations, an electronic control applicator is available on all baler models and sizes. The dial on the control box can be adjusted for correct preservative output. Electronic components in the cab control box hold the application rate constant.

This unit is included for:

- 25 and 55-gallon applicators with electronic control
- 110 and 115-gallon applicators with electronic control for large square balers. (*Manual control available for round and small square balers.*)




## Comparison of Applicator Controls

	Electronic Applicator	300-Series Automatic	600-Series Automatic
Single Pump System	X	X	
3-Pump Manifold			X
Control Box with Adjustable Dial	X		
iPad® Display		X	X
ISOBUS Display			X
Built-in Flowmeter		X	X
Automatic Application		X	X
Moisture Sensing Capability		X	X
Job Record by Field		X	X
Job Records by Individual Bales			X
Calculates Baling Rate: Round Baler			X
Calculates Baling Rate: Small Square Baler, Large Square Baler		X	X
Export Records to iPad			X
Hay Indicator Compatible	X	X	X
Stroke Counter on Small Square Baler			X
Dye Sprayer Kit Compatible: Small Square Baler, Large Square Balers			X
ProID™ System Compatible: Large Square Balers			X



**A OPTIONAL BALE SCALE.**

Provide on-the-go weighing and recording of each bale, accurate within +/- 2% even on hillsides.

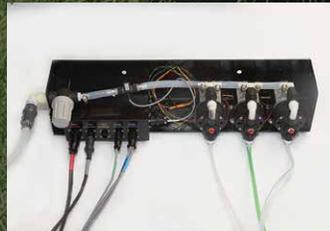

**B PUMP CONTROLLER.**

The Pump Controller is housed in the pump manifold and is controlled by the main Dual Channel Processor, or DCP. Based on readings collected by the moisture sensors, the pump controller turns pumps 1, 2 and 3 on or off, applying the correct amount of preservative for the moisture and tonnage being baled.



**C OPTIONAL TAGGER.**

The ProID™ Tagger is an optional addition to the automatic applicator on large square balers that allows you to take the specific information for each bale and transfer it to a tag that is attached to the twine.

(U.S. Patent 7,621,111B2)  
(U.S. Patent 7,415,924B2)



### **AUTOMATIC CONTROL.**

The touch-panel display is located in the tractor and displays:

- Moisture content
- Speed of baling
- Target application rate and actual application rate
- Volume used
- Last bale average moisture
- Total tons baled



### **D SENSORS FOR SQUARE BALERS.**

Sensors for the automatic system on square balers consist of two star wheels that mount on the top of the bale chute directly behind the knotters.



### **E MAIN PROCESSOR.**

The main processor, or Dual Channel Processor (DCP), is the system's main processing unit that controls the other modules and manages the entire system. Job records are downloaded through the DCP or exported to an iPad.



### **F SPRAY SHIELD AND NOZZLES.**

Spray shields and nozzles have been designed and placed to ensure maximum and even coverage of the crop.

# PRECISE, CUSTOMIZED BALE IDENTIFICATION.

The Case IH ProID™ Bale Identification System on large square balers provides you with the very latest in precision hay production. Versatile and smart, this system allows you to customize your baling operation from start to finish, helping you get the most out of your uptime.

## QUALITY CONTROL.

Tagging bales with the ProID system provides a visible record of moisture, weight, and production location – a benefit for seller and buyer.

## INVENTORY.

Tagged bales make taking inventory easy. Scan bales during stacking, shipping or feeding to maintain an accurate count.

## FEEDING.

Tagging bales helps provide quality feed at consistent moisture levels for best milk production.

## BALE RECORDS.

ProID allows for reading individual bale data. When a bale with excess moisture is scanned into the field, it can be set aside to avoid damaging other bales in a stack.

## SORTING BALES.

Create stacks according to bale quality, moisture levels or bale weights by using the ProID system to scan tags when sorting.

## DESKTOP SOFTWARE.

Install the ProID system on a PC. Tagged and scanned bale information can be saved in the management program, creating searchable, detailed inventory records and printable shipping invoices.



# KEY COMPONENTS OF THE PROID SYSTEM.

## A BALER ANTENNA.

Mounted on the back of the bale chamber, the antenna writes all information gathered by the DCP to the tag.

## B TAGGER.

The tagger mounts on top of the bale chute. When signaled, it lifts the twine and the tag is wrapped to the twine as it is released.

(U.S. Patent 7,621,111B2) (U.S. Patent 7,415,924B2)



## C STAR WHEELS.

Two star wheels are mounted on top of the bale chute behind the knotters. As the wheels turn with the bale, they will record the baling rate and measure moisture between 8% and 70%.

## D MAIN PROCESSOR (DCP).

The key component that drives the ProID system is the main processor (DCP). The star wheel sensors, GPS, and scale (if equipped) send the information to the DCP, which collects the bale information and creates a unique profile for every bale made. That information is then transferred to the tag.



## TAGS.

A permanent vinyl tag is wrapped around the twine, and each tag holds a radio frequency identification (RFID) chip with memory. As the tag passes under the baler antenna, a signal reaches the tag, saving the bale's specific information permanently to the tag.

## DISPLAY.

Information collected by the DCP is displayed on the display. The operator will always see the current moisture, rate of baling, and when the tag is applied.

## READING THE PROID TAGS.

The information on the ProID tag is read with a scanning device. The tag transmits information to a receiver on the scanner display. Using RFID frequency, the tag can be read without seeing it.

### HAND SCANNING.

The tags can be read with a hand-held scanner up to ten feet away.

### SCANNING WHILE RETRIEVING BALES.

When scanner is mounted on hay retriever, bales can be read up to 20 feet away. Bales can be rejected based on moisture level and other criteria. Information about bales (tonnage, number of bales in each grouping) is recorded during stacking.

### SCANNING WITH A HAY LOADER.

When the hay is handled with a loader, the scanner can be mounted on the machine to provide information for sorting and controlling groups of bales. When a stack is made or a truck is loaded, the list of bales is recorded as a group, and can be downloaded and recorded or printed.

### PORTAL SCANNER.

The portal system mounts to a boom over a truck and scans bales up to three deep as the load drives under it. Tag information records to a PC and create a list of shipped and received bales. System antennas can be wired directly to the PC or the data can be sent via wireless signal to a remote location.

See [page 16](#) for a list of ProID part numbers.



# OUR PRODUCTS HELP YOU MAKE BETTER HAY.

From high-quality precision products like ThirtyPlus™ Hay Preservative, applicators with moisture sensors, to proficient pumping systems and spray shields, Case IH can help you get the baling job done and be ready with an assortment of baling accessories.

## DYE SPRAYER KIT.

### Case IH Model 840 Dye Sprayer Kit (Case IH Part No. C0840).

A simple and effective way to mark wet areas on bales. Compatible with any 600-Series Automatic Applicator on small and large square balers, and the 600 Moisture Monitor on large square balers, the three-gallon system is mounted near the bale chamber with the spray tips on the side or top of the bale chamber. Easy to fill and service, one tank of dye mix (Part No. C0800) can last through a full tank of ThirtyPlus Hay Preservative, and is adjustable from 8% to 70% on large and small square balers.

While working, if the high moisture alarm sounds on the display, the system sprays a food-grade, red-colored dye that visibly marks the exact location of the wet spots within the bale, allowing for a quick and easy reference to better manage bales for feeding, sorting, inventory, or storage.



## GPS AND YIELD MAPPING.

An additional GPS package for your large square baler is available to take your productivity to the highest level. By incorporating the AFS 162 GPS receiver from Case IH into the 600-Series Automatic Applicator and ProID™ Tagger, the system will write the coordinates of the exact location the bale was tied off in the field to the tag. Using this technology, the producer now has the ability to create yield maps for their crops, which will allow them to gain the knowledge needed to maximize productivity and plan for future yields.

### AFS 162 GPS Receiver: Part No. 87491749



## BALE WEIGHING / SCALE INTERFACE.

If your large square baler has a dealer-installed scale kit from Case IH, the new 600-Series Automatic Applicator System will automatically interface with the scale controls on the baler and adjust the preservative output for a more accurate application based on the weight. It will also add actual bale weight to the job records and to the ProID™ tag.

### LB334 Scale Kit: Part No. 84427553 LB434 Scale Kit: Part No. 84427554



**MODEL 9212 (12-VOLT) & MODEL 9215 (110-VOLT): ELECTRIC TRANSFER PUMPS.**

**Case IH Part No. C9212 (12-Volt), Case IH Part No. C9215 (110-Volt):** These standard output models will transfer preservative at a rate of four gallons per minute.



**MODEL 9213: HAND TRANSFER PUMP.**

**Case IH Part No. C9213:** Inexpensive, this hand transfer pump is ideal for transferring small amounts of preservative easily.



**MODEL 9214: 12-VOLT HIGH-OUTPUT ELECTRIC TRANSFER PUMP.**

**Case IH Part No. C9214:** For a rapid transfer rate of 14 gallons per minute, this pump will get the job done quickly.



**MODEL FX2000: DELMHORST MOISTURE TESTER.**

**Case IH Part No. CFX2000:** Hand-probe and pad style moisture tester that digitally measures moisture levels in the bales, windrow and in the chamber.



**MODEL 474A: HAY INDICATOR KIT.**

**Case IH Part No. C474A:** This is a great addition to your ThirtyPlus Automatic Hay Preservative System. The kit consists of two eyes that mount on the baler's pick-up head. The eye kit senses when crop is passing through and automatically starts and stops preservative application.



**MODEL 2670DK: iPad KIT.**

**Case IH Part No. C2670DK:** Consists of an iPad Mini with the Hay App pre-loaded, protective case, and mount for the cab. Ideal for customers that don't have their own iPad and want the convenience ordering as a kit.

## APPLICATOR PART NUMBERS

Part No.	Description
<b>LARGE SQUARE BALER</b>	
C6974532B	Automatic Applicator for LB234
C4914532	Electronic Applicator for LB234
C6974533B	Automatic Applicator for LB334 Standard/Packer
C4914533	Electronic Applicator for LB334 Standard/Packer
C6974535B	Automatic Applicator for LB334 Roto-Cutter
C4914535	Electronic Applicator for LB334 Roto-Cutter
C6974534B	Automatic Applicator for LB434 Standard/Packer
C4914534	Electronic Applicator for LB434 Standard/Packer
C6974536B	Automatic Applicator for LB434 Roto-Cutter
C4914536	Electronic Applicator for LB434 Roto-Cutter
C6964495B	Automatic Applicator for LBX331, 332, 431, 432, LB333, LB433 Standard/Packer
C4914495	Electronic Applicator for LBX331, 332, 431, 432, LB333, LB433 Standard/Packer
C6964497B	Automatic Applicator for LBX331, 332, 431, 432, LB333, LB433 Roto-Cutter
C4914497	Electronic Applicator for LBX331, 332, 431, 432, LB333, LB433 Roto-Cutter
C6964528B	Automatic Applicator for LB433, 2011 or newer Standard/Packer
C4914528	Electronic Applicator for LB433, 2011 or newer Standard/Packer
C6964529B	Automatic Applicator for LB433, 2011 or newer Roto-Cutter
C4914529	Electronic Applicator for LB433, 2011 or newer Roto-Cutter
<b>ROUND BALER</b>	
C647C	600-Series Automatic Applicator for RB455, 465, 560, 565
C64725	600-Series Automatic Applicator for RB454, RB464, RBX452, 453, 462, 463

## ProID PART NUMBERS

Part No.	Description
C850	Case IH ProID™ Tagger
C860	Case IH ProID Scanner
C0851	Case IH ProID RFID Tags, 1 roll (850 tags)
C0853	Case IH ProID RFID Tags, 3 rolls (2,550 tags)
C0856	Case IH ProID RFID Tags, 6 rolls (5,100 tags)
C0880	Case IH GPS Attachment
C0840	Case IH Dye Sprayer Marking System
C0800	Case IH Dye for Dye Sprayer
C865	Case IH Portal Scanner

## PRESERVATIVE PART NUMBERS\*†

Part No.	Description
C0903	15-gal Drum of ThirtyPlus™ (120 lbs)
C0904	50-gal Drum of ThirtyPlus (450 lbs)
C0904PQ	Pallet of 50-gal Drums of ThirtyPlus (4/ pallet)
C0908	200-gal Tote of ThirtyPlus (1,800 lbs) U.S. only
C0909	270-gal Tote of ThirtyPlus (2,380 lbs)

\* Note: In Canada, please add a "C" suffix on all part numbers.

† ThirtyPlus Hay Preservative not available in California.

## APPLICATOR PART NUMBERS

Part No.	Description
<b>ROUND BALER (CONTINUED)</b>	
C64755	600-Series Automatic Applicator for RB554, RB564, RBX552, 553, 562, 563
C347C	300-Series Automatic Applicator for RB455, 465, 560, 565
C34725	300-Series Automatic Applicator for RB454, RB464, RBX452, 453, 462, 463
C34755	300-Series Automatic Applicator for RB554, RB564, RBX552, 553, 562, 563
C3464484C	300-Series Automatic Applicator for RB444, RBX442, 443, 451, 461, 561
C442C	Electronic Applicator for RB455, 465, 560, 565
C44225	Electronic Applicator for RB454, RB464, RBX452, 453, 462, 463
C44255	Electronic Applicator for RB554, RB564, RBX552, 553, 562, 563
C4414484	Electronic Applicator for RB444, RBX442, 443, 451, 461, 561
<b>SMALL SQUARE BALER</b>	
C6514415B	600-Series Automatic Applicator for SBX530, 540, 550, SB531, 541, 551
C6504485B	600-Series Automatic Applicator for 8500-Series
C3454415C	300-Series Automatic Applicator (25-gal) for SBX530, 540, 550, SB531, 541, 551
C3514415C	300-Series Automatic Applicator (55-gal) for SBX530, 540, 550, SB531, 541, 551
C3454409C	300-Series Automatic Applicator for SBX520, SB521
C3504485C	300-Series Automatic Applicator for 8500-Series
C4414415	Electronic Applicator (25-gal) for SBX530, 540, 550, SB531, 541, 551
C4404415	Electronic Applicator (55-gal) for SBX530, 540, 550, SB531, 541, 551
C4414409	Electronic Applicator for SBX520, SB521
C4484485	Electronic Applicator for 8500-Series

## ACCESSORIES PART NUMBERS

Part No.	Description
C474A	Hay Indicator Kit (2005 and newer automatic and electronic applicators)
C9213	Hand Transfer Pump
C9212	12-Volt Electric Transfer Pump (4-gallons/min)
C9215	110-Volt Electric Transfer Pump (4-gallons/min)
C9214	12-Volt High Output Electric Transfer Pump (14-gallons/min)
CFX2000	Combination hand-held and in-chamber moisture tester
C2670DK	Universal iPad Mini Display (iPad Mini with Hay App, mount, and charger)
C6672A	600-Series iPad® Conversion Kit (Bluetooth® receiver)
C4672A	400-Series iPad Conversion Kit (Bluetooth receiver) for Kits 2005 and newer

**FOR MORE INFORMATION SEE YOUR LOCAL CASE IH DEALER OR VISIT [PARTSTORE.CASEIH.COM](http://PARTSTORE.CASEIH.COM) TODAY.**



[www.harvesttec.com](http://www.harvesttec.com)

[www.caseih.com](http://www.caseih.com)

PM-17678 11/2016 Replaces PM-17494

©2016 CNH Industrial America LLC. All rights reserved. CNH Industrial Parts & Service is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Case IH is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. ThirtyPlus and ProID are trademarks in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. iPad is a trademark of Apple Inc., registered in the U.S. and other countries. iPad mini is a trademark of Apple Inc. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH Industrial America LLC, are the property of those respective companies.