



# THIRTYPLUS™ HAY PRESERVATIVE

**Applicator Systems & Precision Accessories  
For Baled Hay.**

Applicators | Moisture Sensors | Automatic Controls  
Control Options | Precision Accessories

**CNH** | GENUINE  
PARTS

**CASE IH**





# AN ADVANCED BUFFERED ACID FOR BALING AT HIGH MOISTURES.

Maximize the number of acres baled per day with a chemically-buffered form of propionic acid formulated to prevent spoilage of valuable hay crops. Case IH ThirtyPlus™ Hay Preservative is gentle on your baler with a pH of 6.0 that is as neutral as rainwater, yet just as effective as straight propionic acid. It works on all types of hay, including alfalfa, grass and other crops susceptible to spoilage at higher moistures.

## BENEFITS THAT GO BEYOND BETTER BALE QUALITY:

- Retains hay's freshness, green color and higher feed value for years
- Treats hay at moistures up to 30%
- Works well on all types of hay
- Won't harm equipment, operators or livestock
- Won't freeze or lose effectiveness over time with outside storage

## COMPARED TO OTHER PRESERVATIVES, THIRTYPLUS:

- Is easier to apply
- Gives more consistent coverage
- Won't clog application equipment

## HAY BALED AT HIGHER MOISTURES CAN HEAT AND SPOIL

UNTREATED HAY MOISTURE	DAMAGE
16% – 22%	Hay discoloration and odor can occur
23% – 26%	Hay temperatures can climb to 120°F in storage; mold will begin to form and quality drops significantly
Over 27%	Can result in temperatures over 140°F; hay can turn black and combust

THIRTYPLUS HAY PRESERVATIVE INGREDIENTS	
<b>Active Ingredient</b> Propionic Acid Citric Acid	64.5% 5.0%
<b>Other Ingredients</b> Ammonium Hydroxide, Deionized Water, Sorbitol Green Dyes	30.5%
<b>EPA Registration #73877-1-74898</b>	Total 100%

APPLICATION RATES		
LARGE SQUARE BALES		
Hay Moisture	Stem Moisture	Dew Moisture Only
Under 22%	6 lbs/ton	3 lbs/ton
23% – 26%	10 lbs/ton	8 lbs/ton
27% – 30%	DO NOT BALE	16 lbs/ton
SMALL SQUARE & ROUND BALES		
Hay Moisture	Stem Moisture	Dew Moisture Only
Under 22%	4 lbs/ton	2 lbs/ton
23% – 26%	8 lbs/ton	6 lbs/ton
27% – 30%	16 lbs/ton	12 lbs/ton

Not recommended on any hay above 30% moisture.

AVAILABLE IN FOUR SIZES FOR ANY SIZE  
BALING OPERATION

- **15-Gallon Drum:** Ideal for smaller operations
- **50-Gallon Drum:** Treats up to 100 tons of hay
- **200 or 270-Gallon Tote:** Ideal for larger square baler operators



THIRTYPLUS HAY PRESERVATIVE CONTAINER SIZES†	
<b>Mini Drum</b>	120 lbs/15 gal (54 kg/50.5 L)
<b>Drum</b>	450 lbs/50 gal (204 kg/189.3 L)
<b>Totes</b>	1,800 lbs/200 gal* (818 kg/757 L)
	2,380 lbs/270 gal (1,082 kg/1,020 L)

\* Not available in Canada.  
† ThirtyPlus Hay Preservative is not available in California.



COST-EFFECTIVE

Bales treated with ThirtyPlus yield more tonnage and have a higher relative feed value.



SAFE FOR LIVESTOCK

Propionic acid, the main ingredient in ThirtyPlus, is an organic acid occurring naturally in a horse's gastrointestinal tract.

In ruminants, propionic acid is produced by rumen bacteria and is beneficial in the digestive process.



SAFE ON EQUIPMENT

The ingredients in ThirtyPlus will not cause corrosion on your baling equipment.



MAXIMUM PRODUCTIVITY

When paired with approved Case IH applicators at the recommended application rate, ThirtyPlus maximizes hay baling productivity year after year.



SEE PAGE 16 FOR A LIST OF  
THIRTYPLUS HAY PRESERVATIVE  
PART NUMBERS.



# BETTER BALES WITH BETTER APPLICATION EQUIPMENT.

Case IH automatic applicator moisture sensors accurately read moisture percentages in real time, adjusting application rates every three seconds to match hay conditions. Large or small, our application process means your crops are baled at the highest quality possible, with minimal product waste.



## LARGE SQUARE BALERS

Automatic systems for large square balers are equipped with star wheels that mount on the top of the bale chute. Accurately reads moisture from 6% to 70%.

## ROUND BALERS

Automatic systems for round balers are equipped with two sensing discs, one mounted on each of the baler's sidewalls. Reads moisture from 6% to 60% on 300 and 700-Series Systems.

## SMALL SQUARE BALERS

Sensors for the automatic system on small square balers consist of two star wheels that mount on the bottom of the bale chute. Reads moisture from 8% to 32% on 300 and 700-Series Systems.

### Watch a Video:

Scan the QR code to watch the  
ThirtyPlus & 300 Series Automatic  
Applicator in action:



## EFFICIENT DESIGN WITH YOU IN MIND

Tanks and saddles are easy to install, operate, and service. They are designed to be mounted out of the way of other baler operations for added safety.



No matter what baler you use, there is a  
**Case IH ThirtyPlus** applicator for your implement.



# MOISTURE DOESN'T STAND A CHANCE.


Sensors in the applicators accurately sense moisture levels on round, large or small square balers. A positive sensor is mounted on one side with an isolated ground mount on the other side. When the bale makes contact, a current passes through it, measuring moisture from one side to the other. This results in a moisture reading that is accurate to within one point.

## 700 SERIES AUTOMATIC APPLICATOR FOR LARGE SQUARE BALERS

Using side-to-side moisture reading technology, the 700 Series Automatic Applicator reads crop moisture across the width of the bale near the front of the chamber via moisture sensing dual star wheel sensors.

This process accurately reads crop moisture from 6% up to 70%.

See [page 15](#) and back page for a list of applicator, preservative and accessories part numbers.

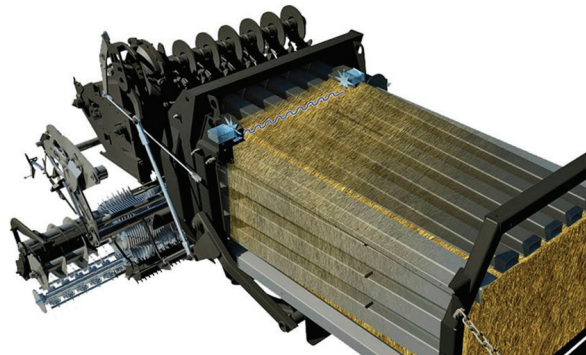

## ProEWS™ MICROWAVE MOISTURE OPTION FOR LARGE SQUARE BALERS

When using with preservative applicators, the Microwave Moisture Sensor Option:

- Mounts closer to the pickup head where preservative is applied
- Reads moisture across individual flakes through the pre-compression chamber, eliminating lag time
- Displays moisture through baler ISOBUS or tablet
- Is available as an upgrade option to all 700 series applicators
- Works with most brands of large square balers



The ProEWS Microwave Moisture Option reads crop moisture accurately up to 40% using on-baler microwave sensors.



▲ Pre-compression chamber mounting location



▲ Microwave sensors mounted on the rear of bale chamber

**PROEWS™**  
ELECTROMAGNETIC WAVE SENSOR





# AUTOMATIC CONTROLS.

## ROUND & SMALL SQUARE BALERS

### 300 & 700-SERIES

The automatic system for round and small square balers consists of a compact processor, and a single bypass pump that supplies constant pressure to a pulsing solenoid. This efficient design allows a fast response time for applying preservative. The 300 series system is controlled through an iPad via a wired connection for a clear, colorful display.

The automatic system is able to store up to 60 job records by field name with total tons baled, average high moisture, date and time, and amount of preservative used.

The 700-Series Automatic Applicator System for round and small square balers makes baling hay and keeping track of bales virtually effortless. The single pump system continuously monitors moisture readings and automatically adjusts application rates with a pulsating solenoid. The system on small square balers has an optional stroke counter to help the operator create a more consistent bale by monitoring the number of flakes per bale. The system on round balers has an additional sensor on the bale door to identify individual bales and provide a more accurate tonnage reading. The 700 series system is controlled through an iPad or Android tablet via a wired connection for a clear colorful display\*. The 700 series can also display on a dedicated ISO Virtual Terminal with an optional adapter harness.



### 300 & 700-SERIES MONITORS DISPLAY:

- Moisture content (instantaneous and average bale moisture)
- Speed of baling (tonnage)
- Volume of preservative used per bale
- Target application rate and actual application rate
- Total tons baled by job

## LARGE SQUARE BALERS

### 700-SERIES

The 700-Series Applicator is an improvement over previous model applicators with these key designs:

- Single bypass pump supplies constant pressure to pulsating solenoid valves for improved response time to changes in moisture
- Improved flowmeter works on a range of products
- Display applicator readings on dedicated Virtual Terminal, Apple tablet\*, or Android tablet\*\*
- Free Precision Baling app is available on Apple iTunes\* or Google Play\*\* store for approved tablets

\*Requirements to run Apple iPad are 3rd Generation (2012) or newer, running the current iOS operating system.

\*\*Requirements to run Android are Google Play, 5th Generation, plus the Precision Baling App.



# ProRFV™ SYSTEM FOR LARGE SQUARE BALERS.

The ProRFV System is a breakthrough concept, allowing the hay producer to view, record, and track the Relative Feed Value (RFV) for each bale that they produce. The ProRFV System is advanced software that is downloaded to your ThirtyPlus Applicator or 700BB Moisture System, tied into the scale kit on the baler, and able to give the operator everything needed to manage those variations in quality.

## HOW DOES IT WORK?

The system is based on the principle that most of the feed value is in the leaves of the plant. That means the higher the leaf content, the higher the density and quality of the bale.

### System process:

1. Hay grower takes a sample of hay just before or after its cut
2. The sample is sent to a lab
3. The sample value is entered into the 700 Series System when it's time to bale
4. As the baler operates:
  - The star wheel sensors take accurate moisture readings
  - The scale measures the weight
  - The system calculates the dry matter density and RFV for each bale
5. The RFV is displayed on the baler screen as the baler is running and stored into the downloadable job records

### Requirements to measure Relative Feed Value (RFV):

- Complete 700 Series Applicator or 700BB, 700BBHD Moisture Only System
- Case IH Chute Scale

## ACCOUNTABILITY

As the RFV is calculated and compiled to the job record, it is important to identify how the values of quality can impact the hay production process. The advantage of identifying RFV is significant, especially for dairy producers, as sorting and feeding hay according to quality allows for accurate ration adjustments, keeping milk production consistent.

Using the ProRFV technology, the dairyman can drive potential cost savings by feeding only what the cow needs, increasing their bottom line.

For producers or brokers involved with selling hay, having the ability to sort, stack, and ship by RFV can greatly improve their ability to make sure that each customer gets the quality level of hay that they expect.

## ACCURACY


The ProRFV System is a new and efficient substitute for the conventional coring of bales to determine feed value, which has been the standard for many years. The ProRFV System studies have been conducted on multiple farms across multiple states, each showing the accuracy of the system.

Additional studies can be found at [www.harvesttec.com/case-relative-feed-value/](http://www.harvesttec.com/case-relative-feed-value/)

“On one field, we split the core samples from 50 bales and sent them to two different labs. The RFV levels came back from the two labs 4% apart, which isn't bad. The ProRFV-calculated values were right in the middle, only 2% difference from either lab.”

— Don Leonard, Brush, Colorado

Representation of Core Samples Compared to ProRFV Calculated Bales From Two Fields

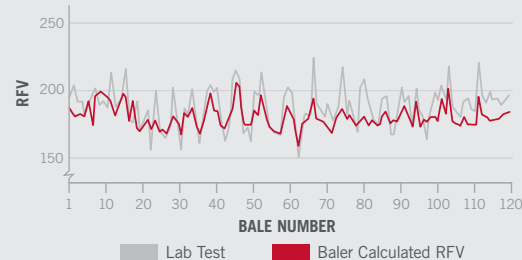






# YOU SET THE STAGE FOR LARGE SQUARE BALERS.

Automatic applicators take the guesswork out of baling hay by sensing moisture content and adjusting preservative application rates on the go. You have complete control from the tractor with the baler's AFS Pro 700 monitor, customer's tablet or the new dedicated virtual terminal. New, simple operating design allows for on-the-go information and quick adjustments all on one screen!

## AUTOMATIC MODE

The 700 system accurately senses moisture on-the-go and adjusts the application of preservative every three seconds to match hay conditions.

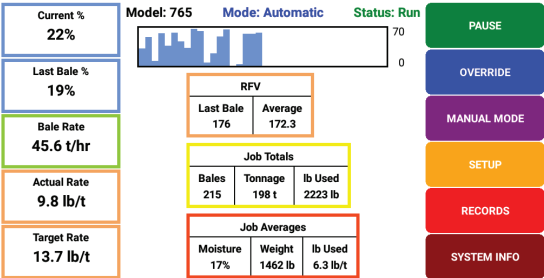

## MANUAL MODE

Operator can override automatic features and proceed as needed and apply a consistent rate of preservative.

## SETUP

Adjust moisture points or set rate per ton. Weights for balers not equipped with scale can be estimated.

## JOB RECORDS

Knowledge is power. Detailed job records, as shown below, help you stay efficient.

- Average and high moisture levels
- Bale weight (if equipped with roller chute scale)
- Amount of product used
- Date/time
- GPS position of bale (if equipped)

View Job List						
Job #	Farm	Field	Crop	Started	Ended	Bales
4	Brown	SW corner	Alfalfa RU 1	10-Mar-20	10-Mar-20	187
26	Brown	Nw corner	Alfalfa NS 2	10-Mar-20	10-Mar-20	174
6	J.Smith	ravene	straw	10-Mar-20	11-Mar-20	87
9	Dairy Farms	grn pasture	alfalfa 2nd	11-Mar-20	12-Mar-20	320
10	Dooleys	14	Alfalfa NS 2	14-Mar-20	14-Mar-20	92
16	Billy Joe	coop	straw	15-Mar-20	15-Mar-20	114
17	Gustavus	the ridge	alfalfa 3rd	15-Mar-20	15-Mar-20	72
21	Test Site 2	Plot 45	56798-3	16-Mar-20	16-Mar-20	369
3	Smith	A34	alfalfa X1	16-Mar-20	16-Mar-20	221

Viewing Filters:

Farm: All

Field: All

Crop: All

EXPORT ALL JOBS

DELETE ALL JOBS

ADD TO THIS JOB

JOB LIST

VIEW CURRENT JOB

VIEW SELECTED JOB

CREATE NEW JOB

HOME

SEE PAGE 15 FOR A LIST OF APPLICATOR PART NUMBERS.

# ROUND OR CONVENTIONAL BALERS, YOU'RE IN CONTROL.

Automatic applicators provide “in-the-field” office management for your baling operations.

## 300 AND 700 MONITORS

- Control the automatic application of preservative
- Allow moisture to be read continuously by sensors, fed to the processor and displayed as it changes, 200 feet at a time
- Measure speed of baling, the amount of preservative used and the average moisture of the last bale
- Applicator automatically adjusts the rate of preservative application every three seconds when in automatic mode. Actual rate of application is read by a flow meter and displayed on the screen as “actual” and compared to the set “target” rate
- Adjusts for speed of baling on both automatic systems on conventional square balers

## EVERYDAY ELECTRONIC CAB CONTROL

Designed for small-scale operations, an electronic control applicator is available on all baler models and sizes. The dial on the control box can be adjusted for correct preservative output. Electronic components in the cab control box hold the application rate constant.

- Available with a 25 or 55 gallon tank for round and small square balers
- 110 & 115 gallon tanks on large square systems (baler dependent)
- Conveniently mounted in the cab of tractor or fender
- Upgradeable to an automatic applicator system



## CASE IH DISPLAYS:



Graph of the  
last 200 feet of  
window moisture



Actual and  
target rate




Current moisture  
and moisture  
of last bale



Preservative  
used




# COMPONENTS OF 700 SERIES APPLICATOR.

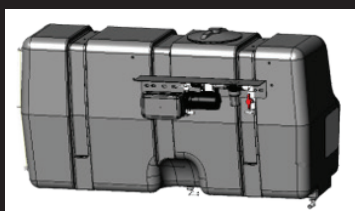


## **A PUMP PLATE**

Mounted on preservative tank includes bypass pump and flow meter.

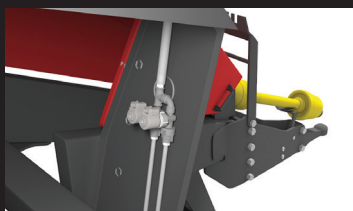

## **B DUAL PULSING SOLENOIDS**

Accurately control rate of preservative with a range from 24 lb/hr up to 700 lb/hr

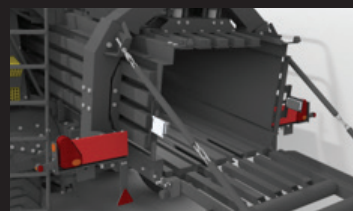

## **C OPTIONAL MICROWAVE MOISTURE SENSORS**


Positioned at back of bale chamber (shown) for artificial moisture applications. Additionally, can be positioned in pre-compression chamber for improved preservative placement in bale





**G OPTIONAL GPS ANTENNA**

Records position of bale and adds it to job record

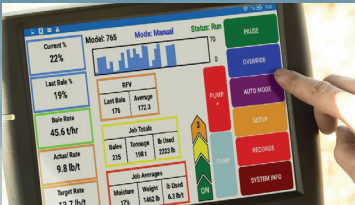

**DISPLAY (NOT INCLUDED)**


Improved functionality for ease of operation; integrates through the baler virtual terminal

**D**

**F**


**Watch a Video:**

Scan the QR code for an overview of the 700 Series Automatic Applicator for large square balers:

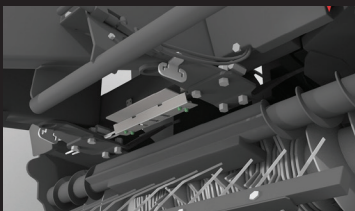

**D SPRAY SHIELD/TIPS**

Hay preservative applied at baler pickup on loose windrow as fed into the baler

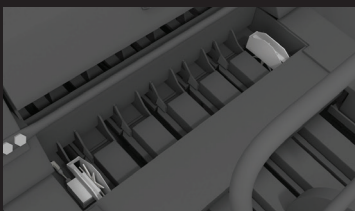

**E DUAL STAR WHEELS**

Sends low voltage signal to accurately sense moisture at front of bale chamber



**F OPTIONAL HAY INDICATOR (CROP-EYES) END OF ROW SHUT-OFF SENSOR**

Automatically turns applicator on/off when enter/exiting windrow

[www.mcnishore.com/thirtyplus](http://www.mcnishore.com/thirtyplus)



# BALE IDENTIFICATION: OUR PRECISION PRODUCTS HELP YOU MAKE BETTER HAY.

From best-in-class Case IH ThirtyPlus™ Hay Preservative to high-quality precision products like worry-free applicators with moisture sensors, GPS mapping, bale scales, proficient pumping systems and spray shields, Harvest Tec and Case IH can help you get the baling job done and be ready with an assortment of baling accessories.

## MOISTURE DYE SPRAYER KIT

### The Case IH Model (Part No. C740DM) Dye Sprayer Kit

A simple and effective way to mark wet areas on bales, allowing for a quick and easy reference to better manage feeding, sorting, inventory or storage.

- Compatible with any 700-Series Automatic Applicator and 700 Moisture (only kit) on large, small, and round balers
- Easy to fill and service
- One tank of dye mix [Part No. C0800] lasts through a full tank of ThirtyPlus Hay Preservative




## RFV DYE SPRAYING KIT

### RFV Dye Marker: Part No. C745RFV

An economical alternative to identifying RFV values on the bale. Consisting of a 3-gallon tank, and 3 pumps and spray nozzles, the operator inputs the RFV ranges into the ProRFV System that they want to identify.

The kit sprays each bale with one, two, or three stripes of food-grade dye, showing the operator the RFV range of that bale for easy identification and sorting.



## BALE WEIGHING / SCALE INTERFACE

### LB334 Scale Kit: Part No. 84427553

### LB434 Scale Kit: Part No. 84427554

If your large square baler has a dealer-installed scale kit from Case IH, the new 700-Series Automatic Applicator System will:

- Interface with the scale controls on the baler
- Adjust the preservative output for more accurate application based on weight
- Add actual bale weight to the job record



### **MODEL 9212 (12-VOLT) & MODEL 9215 (110-VOLT): ELECTRIC TRANSFER PUMPS**

**Case IH Part No. C9212 (12-Volt),  
Case IH Part No. C9215 (110-Volt):**  
These standard output models will transfer preservative at a rate of four gallons per minute.



### **MODEL 9213: HAND TRANSFER PUMP**

**Case IH Part No. C9213:**  
This hand transfer pump is ideal for transferring small amounts of preservative easily.



### **MODEL 9214: 12-VOLT HIGH-OUTPUT ELECTRIC TRANSFER PUMP**

**Case IH Part No. C9214:**  
For a rapid transfer rate of 14 gallons per minute, this pump will get the job done quickly.



### **MODEL FX2000: DELMHORST MOISTURE TESTER**

**Case IH Part No. CFX2000:**  
Hand-probe and pad style moisture tester that digitally measures moisture levels in the bales, windrow and chamber.



### **MODEL 474A & 474C: HAY INDICATOR KIT**

**C474A Kit:** Electronic, 300 & 600 series applicators  
**C474C Kit:** 700 Series only  
The kit consists of two eyes that mount on the baler's pickup head. The eye kit senses when crop is passing through and automatically starts and stops preservative application.



### **AFS VECTOR PRO RECEIVER: GUIDANCE & ACCURACY, STREAMLINED**

**Case IH Part No. 48183183:**  
AFS Vector Pro provides reliable and consistent terrain-compensated position, helps acquire guidance lines very quickly, and utilizes various correction levels depending on your operation needs.



# ON-BALER ECONOMY MOISTURE SENSORS.

Introducing the most efficient, cost-effective moisture monitor with accurate readings. The new H<sub>2</sub>O Precision Moisture Sensor from Harvest Tec is the answer.

Using the patented\* side-to-side moisture reading technology, the kit reads crop moisture across the width of the bale in the chamber via moisture sensing discs for round balers, or dual star wheel sensors for large and small square balers. The sensor will read crop moisture from 5% up to 60% on round balers, 70% on large square balers, and 33% for small square balers, for those customers that make high moisture bales as well as dry bales.

## FEATURES OF THE NEW HARDWIRE DISPLAY INCLUDE:

- Security of a hardwired solution
- Built-in tablet/smartphone charging capabilities

The moisture sensor uses the operator's Apple or Android\*\* smart phone or tablet as the monitor. The H<sub>2</sub>O control is mounted in the cab and connects via the charging cable to your device, along with the free H<sub>2</sub>O app from Harvest Tec.



**NOTE:** H<sub>2</sub>O kit includes wired integration control module.

### Watch a Video:

Scan the QR code for an overview of the H<sub>2</sub>O moisture sensor for round balers.



\*Patent No. 8,860,443


\*\*Requirements to run H<sub>2</sub>O app and current iOS, or later for Apple devices, and Android 5 for Android devices

## PRECISION MOISTURE SENSOR FEATURES AND BENEFITS:

- Displays instantaneous moisture
- Add on kit is available to provide last bale average moisture (required for fixed chamber round balers)
- Rugged disc plates and star wheels are designed for long-term use with minimal wear
- App is simple to use and free to download from the iTunes Store or Android Play Store
- Only on-baler moisture sensor to read up to 60% with reliable accuracy for round balers



The H<sub>2</sub>O moisture sensor has two star wheels or discs in the bale chamber that read across the width of the bale, taking five readings of resistance per second, giving the operator complete visibility of crop conditions.

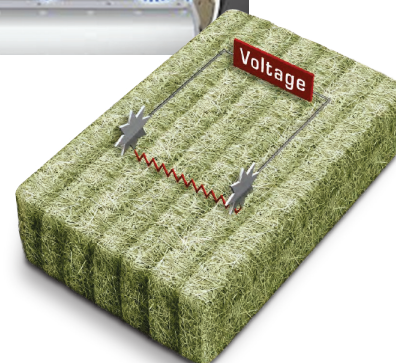

# APPLICATOR PART NUMBERS.



## LARGE SQUARE BALERS

Baler	Part No.
<b>AUTOMATIC APPLICATOR KITS</b>	
LB234	C7964532C
LB334(+) Standard/Packer	C7964533C
LB334(+) Roto-Cutter	C7964635C
LB434(+) Standard/Packer	C7964534C
LB434(+) Roto-Cutter	C7964636C
LB436HD Rotocut	C7954636C
LBX331, 332, 431, 432, LB333, LB433 (Pre-2011) Standard/Packer	C7964495C
LBX331, 332, 431, 432, LB333, LB433 (Pre-2011) Roto-Cutter	C7964497C
LB433 (2011 or newer) Standard/Packer	C7964528C
LB433 (2011 or newer) Roto-Cutter	C7964529C

## LARGE SQUARE BALERS

Baler	Part No.
<b>ELECTRONIC APPLICATOR KITS</b>	
LB234	C4914532
LB334(+) Standard/Packer	C4914533
LB334(+) Roto-Cutter	C4914535
LB434(+) Standard/Packer	C4914534
LB434(+) Roto-Cutter	C4914536
LB436HD Rotocut	C4904536
LBX331, 332, 431, 432, LB333, LB433 (Pre-2011) Standard/Packer	C4914495
LBX331, 332, 431, 432, LB333, LB433 (Pre-2011) Roto-Cutter	C4914497
LB433 (2011 or newer) Standard/Packer	C4914528
LB433 (2011 or newer) Roto-Cutter	C4914529



## ROUND BALERS

Baler	300 Series Part No.	700 Series Part No.
<b>AUTOMATIC APPLICATOR KITS (Requires iPad as display)</b>		
RB455, 465, 560, 565	C347C	C747C
RB456, 466 HD Pro Series	C347P	C747P
RB454, RB464, RBX452, RBX453, RBX462, RBX463	C34725	C74725
RB554, RB564, RBX552, RBX553, RBX562 & RBX563	C34755	C74755
RB444, RBX442, RBX443, RBX451, RBX461 & RBX561	C3464484C	-
RB Utility Plus Baler	C347UP	-
<b>ELECTRONIC APPLICATOR KITS</b>		
RB455, 465, 560, 565	C442C	-
RB456, 466 HD Pro Series	C442P	-
RB454, RB464, RBX452, RBX453, RBX462, RBX463	C44225	-
RB554, RB564, RBX552, RBX553, RBX562 & RBX563	C44255	-
RB444, RBX442, RBX443, RBX451, RBX461 & RBX561	C4414484	-
RB Utility Plus Baler	C442UP	-



## SMALL SQUARE BALERS

Baler	300 Series Part No. (25 Gal Tank)	300 Series Part No. (55 Gal Tank)	700 Series Part No. (55 Gal Tank)
<b>AUTOMATIC APPLICATOR KITS (Requires iPad as display)</b>			
SBX520, SB521	C3454409C	-	-
SBX530, 540, 550, SB531, 541, 541C	C3454415C	C3514415C	C7514415C
<b>ELECTRONIC APPLICATOR KITS</b>			
SBX520, SB521	C4414409	-	-
SBX530, 540, 550, SB531, 541, 541C	C4414415	C4404415	-



# ACCESSORIES PART NUMBERS.

## THIRTYPLUS™ HAY PRESERVATIVE PART NUMBERS\*†

Description	Part No.
15-gal Drum of ThirtyPlus (120 lbs)	C0903
50-gal Drum of ThirtyPlus (450 lbs)	C0904
Pallet of 50-gal Drums of ThirtyPlus (4/pallet)	C0904PQ
200-gal Tote of ThirtyPlus (1,800 lbs) U.S. only	C0908
270-gal Tote of ThirtyPlus (2,380 lbs)	C0909

\* **Note:** In Canada, please add a “C” suffix on all part numbers.  
† **ThirtyPlus Hay Preservative not available in California.**

## MICROWAVE MOISTURE KIT PART NUMBERS

Large Square Balers Only

Part No.	Part No.
<b>BACK OF BALE CHAMBER</b>	
Microwave Moisture Chute Upgrade Kit - Requires 700 Series Base Kit	C771MWM
<b>PRE-COMPRESSION CHAMBER</b>	
Microwave Moisture Pre-Compression Chamber Upgrade Kit - Requires 700 Series Base Kit	C770MWM

## OPTIONAL DISPLAY PART NUMBERS

Description	Part No.
700 Series Applicator Android Tablet Kit	C1670DK
700 Series Applicator VT Monitor Kit	C7670DK
Universal iPad Mini display (iPad mini 4 w/ Hay App, mount and charger) for 300, 400 & 600 series	C4670DK
<b>MOISTURE ONLY KITS</b>	
Moisture Only Kit for Large Baler (display not included). Integrates through baler display.	C700BB
Precision Moisture on Kit Small Square Balers	C201SS*
Precision Moisture on Kit Roll Belt Round Balers	C201RBC*
End of bale sensor kit provides bale avg moisture. For use with 201 kits. Required for fixed chamber round balers.	C200FCA

\* Requires phone/tablet as display



**HARVEST  
TEC** Equipment and Products  
for Quality Hay.™

[www.harvesttec.com](http://www.harvesttec.com)

**THIRTYPLUS™**

**CNH** | **GENUINE  
PARTS**

[www.mycnhstore.com/thirtyplus](http://www.mycnhstore.com/thirtyplus)

**CASE IH**

PM-23384 2/2024 Replaces PM-21101

©2024 CNH Industrial America LLC. All rights reserved. Case IH, CNH Genuine Parts and ThirtyPlus are trademarks in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. iPad is a trademark of Apple Inc., registered in the U.S. and other countries. iPad mini is a trademark of Apple Inc. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH Industrial America LLC., are the property of those respective companies.